

# Multi-Flash Square Vent Master Flash®

Two applications three sizes  
**One Design • Multiple Functions**

Advanced Ozone Resistance tested to...		EPDM 70 hour @ 500 pphm	HIGH TEMP RED SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent Continuous	+135°C (+275°F) +100°C (+212°F)	+260°C (+500°F) +225°C (+437°F)
Low Temperature Resistance tested to...		-55°C (-67°F)	-74°C (-101°F)
Compression Set Maximum...		25%	50%


\*Complete specification data and testing methods are available upon request.

**For the Metal Roofing Industry**  
**Designed for both standard or retrofit applications**




## Weather Protection Made of EPDM or High Temp Red Silicone,

These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.

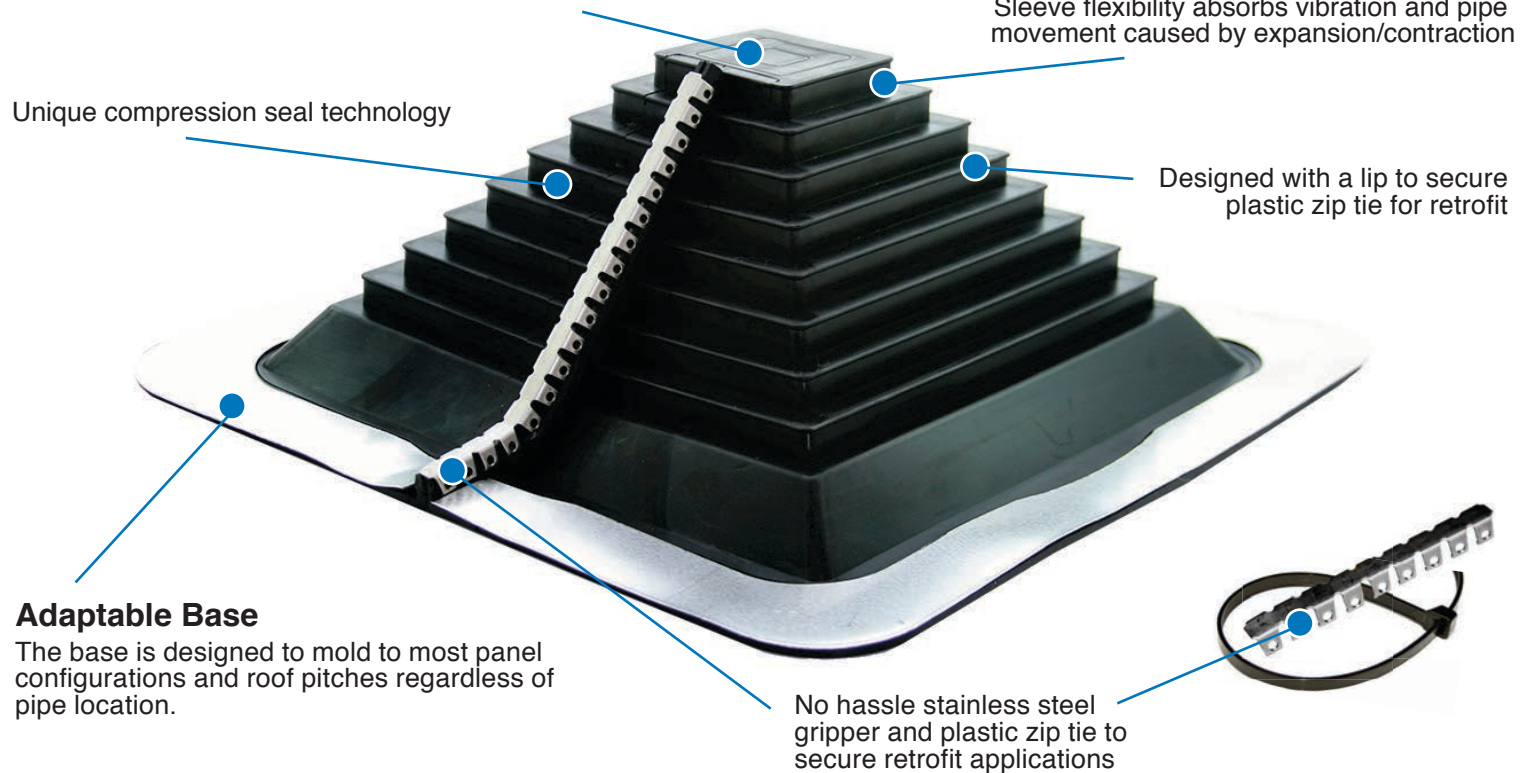


### #1 Multi-Flash Square Vent Flashing Details




A-Top Opening	Closed
B-Overall Height	3/4" - 5" (20 - 125mm)
C-Base	8" (203mm)

### #2 Multi-Flash Square Vent Flashing Details



A-Top Opening	Closed
B-Overall Height	1" - 10" (25 - 254mm)
C-Base	16-3/4" (425mm)

### #3 Multi-Flash Square Vent Flashing Details



A-Top Opening	Closed
B-Overall Height	2" - 19-1/8" (50 - 485mm)
C-Base	24-3/4" (628mm)