



# The Low-Profile Master Flash®

Specifically designed for  
**Sidewall or Low Profile Applications**

Advanced Ozone Resistance tested to...		EPDM 70 hour @ 500 pphm	WHITE HIGH TEMP SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent Continuous	+135°C (+275°F) +100°C (+212°F)	+260°C (+500°F) +225°C (+437°F)
Low Temperature Resistance tested to...		-55°C (-67°F)	-74°C (-101°F)
Compression Set Maximum...		25%	50%

\*Complete specification data and testing methods are available upon request.



## Applications:

Drywall • Sidewall Applications • Stucco Walls  
Corrugated Metal Sides • Roof Penetrations



Black EPDM

Light Grey EPDM



FDA White High Temp Silicone

Dark Grey EPDM


## EPDM Colors Available:

Brown • Black • Dark Grey • Light Grey • Light Grey • White • Dark Green  
Light Green • Dark Blue • Light Blue • Bright Red • Terra Cotta • Copper • Tan



SIZE PIPE RANGE	COMPOUND	PART #	FLASHING DETAILS
--------------------	----------	--------	------------------

Low Profile Fits up to 4" Pipes	Black EPDM	LP101BA
	LT Grey EPDM	LP101GA
	DRK Grey EPDM	LP101NG
	FDA White Silicone	LP102WT

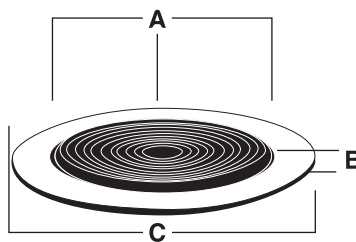

A-Top opening diameter	Closed 0" – 4"
B-Overall Height	5/16"
C-Base dimensions	6-1/4"