



June, 2022



#WESTFORMMETALS

ABOUT POLYCARBONATE

INSTALL

PRE-DRILL ALL HOLES 1/8" TO 3/16" LARGER THAN THE DIAMETER OF THE FASTENER TO BE USED.

FASTENER PER THOUSAND
#14 X 1.25" GALV, 1" BONDED WASHER \$

SPAN
2' O.C.

PANEL THICKNESS
.032"

936 POLY-LITE WEIGHT
.69 LBS/FT.

BENEFITS

BRINGS NATURAL LIGHT INTO BUILDINGS

100% UV PROTECTION



WITHSTANDS EXTREME TEMPERATURES (-40°F TO +270°F)

HAIL AND WIND RESISTANT


TEN YEAR LIMITED WARRANTY
NOTE

936 POLY-LITE IS SIMILAR TO ALLCLAD/DURA CLAD IN APPEARANCE, HOWEVER IT WILL NOT ENDLAP. IT WILL LAP SIDE TO SIDE.

POLYCARBONATE

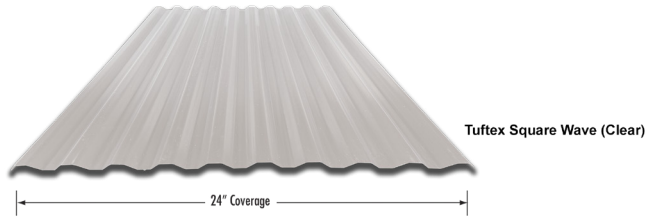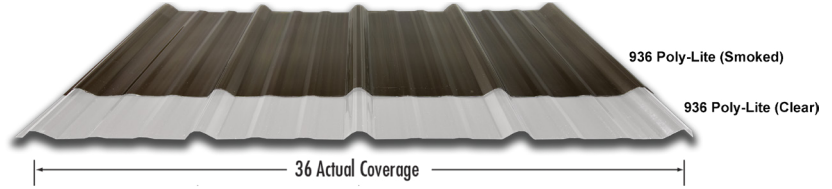


936 POLY-LITE 36" COVERAGE, 3/4" HIGH RIB, 9" O.C.

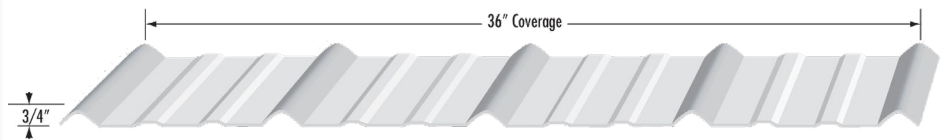


936 POLY-LITE 2' CLEAR	\$ EACH
936 POLY-LITE 8' CLEAR	\$ EACH
936 POLY-LITE 10' CLEAR	\$ EACH
936 POLY-LITE 12' CLEAR	\$ EACH
936 POLY-LITE 12' SMOKED	\$ EACH

TUFTEX SQUARE WAVE. 24" COVERAGE, 9/16" HIGH RIB, CONTINUOUS

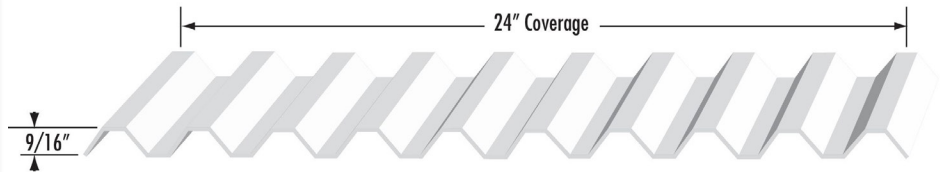

POLYCARBONATE 8' CLEAR	\$ EACH
POLYCARBONATE 10' CLEAR	\$ EACH
POLYCARBONATE 12' CLEAR	\$ EACH

RIDGE-LITE. 24" X 10'6"

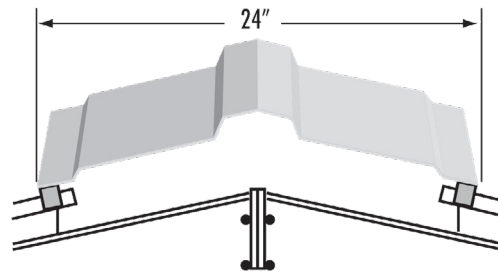

POLYCARBONATE RIDGE CAP CLEAR	\$ EACH
-------------------------------------	---------

TERMS Net 30 Days. Prices subject to change without notice.

www.westform.com