
Colonial Red Tahoe Blue Dark Bronze Polar White Cambridge White White White **Brite White Bone White** Dark Green Terra Cotta **ALLCLAD** 36" Coverage Low Gloss Black Brite Red Dark Red Tile Red Weathered Copper Copper Penny Weathered Zinc Silver Metallic Antique Linen Burgundy Iron Ore Black Autumn Stone Grey Regent Grey Charcoal Grey Acorn Barn Board Canyon WF-12-36 & 12-36R WF-12-36 (Wall & Roof) WF-12-36R (Wall) — 36" Coverage — 36" Coverage Frontier Black Coffee Metro Brown Dark Brown Tan Espresso Gunstock Homestead lvory Durango 32" Coverage Deep Water Green Melchers Green Brite Green Pacific Turquoise Ponderosa Saddle Wagonwood Ashwood* Concrete* Buckskin - 31" Coverage _10.33**"**_ Flat Standard Knotty Pine* Light Pine* Mesquite* Slate Blue Heron Blue Sapphire Blue Corten* Turquoise Royal Blue IMPORTANT NOTE ON COLOR MATCHING 12"&16" 12"&16"_ Colors can vary between different paint batches and Coverage Coverage production runs on painting lines. Furthermore, over extended periods, the color of the originally installed panels will weather and therefore vary from replacement panels and panels for new additions. **Burnished Slate TEX Graphite TEX** Onyx Black TEX Kona Brown TEX International Orange Sportsman Yellow Gold 29GA (37" COVERAGE) 39" Coverage (26ga) Colors are shown as accurate as printing methods will permit. Please see actual product samples for true color. Colors are shown as accurate as printing methods will permit. Please see actual product samples for true color. 26GA (39" COVERAGE) 37" Coverage (29ga) See cladding product pages for profile color availability and on line Color Catalogue for additional available colors. See cladding product pages for profile color availability and on line Color Catalogue for additional available colors. 40-year limited warranty on painted products. *20-year limited warranty for Polyester Printech products. 40-year limited warranty on painted products. *20-year limited warranty for Polyester Printech products.

METAL PROFILES



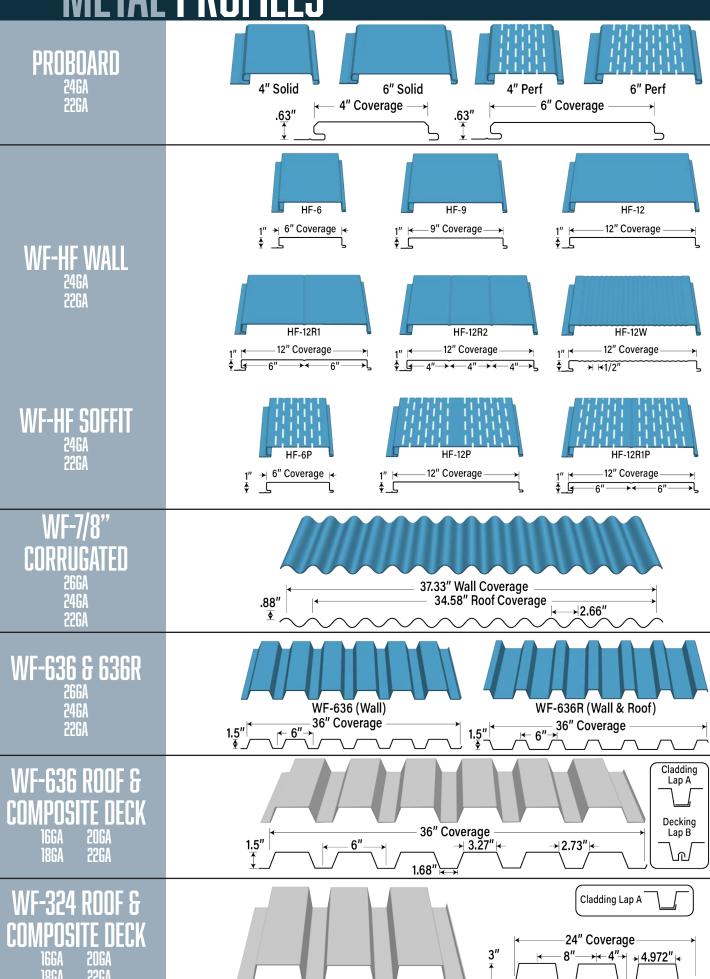

MAINTENANCE

A thorough building cleanup after completion of construction should be conducted to remove all debris, metal fines, etc. from walls and roofs.

For low slope roofs an annual inspection should be conducted to remove accumulated debris (i.e. leaves and branches) and to detect any signs of possible coating deterioration.

Regular washing of pre-finished steel can extend service life and maintain the appearance of the finish. This should be part of the building maintenance program and be done in the spring. Washing with clear water (hose or light pressure sprays is often sufficient.

Solvents and abrasive cleaners should be avoided. Caulking compounds, oils, greasers, tars, wax and similar substances can be removed with mineral spirits applied only to the affected areas. Cleaning and a thorough rinsing with water should follow the use of the mineral spirits.

TRANSPORTATION

If material is to be moved in wet or snow conditions, product must be tarped to prevent moisture penetration.

STORAGE

Material not being installed right away: condensation and water penetration will create white rust and could cause the paint to lift from pre-painted metal.

It is recommended and preferred that a dry area be used, or covered with a provision for air circulation. Do not use plastic.

To prevent corrosion, it is further recommended that material be kept way from salt cement and fertilizers.

If bundled materials should become wet, it is recommended that you separate material immediately and wipe dry.





STANDARD | CLADDING

