

					
Brite White	Polar White	Cambridge White	White White	Bone White	Cashmere
					
Antique Linen	Wicker	Tan	Pebblestone	Stone Grey	Regent Grey
					
Charcoal Grey	Iron Ore	Black	Buckskin	Black Coffee	Metro Brown
					
Dark Brown	Turquoise	Pacific Turquoise	Deep Water Green	Melchers Green	Sapphire Blue
					
Royal Blue	Slate Blue	Heron Blue	Brite Red	Tile Red	Dark Red
					
Burgundy	International Orange	Gold			
					
Tahoe Blue	Dark Green	Colonial Red	Terra Cotta	Dark Bronze	Weathered Copper
					
Copper Penny	Weathered Zinc	Silver Metallic	Low Gloss Black		
					
Acorn	Autumn	Barn Board	Birch	Canyon	Durango
					
Espresso	Frontier	Gunstock	Homestead	Ponderosa	Saddle
					
Wagonwood	Ashwood*	Concrete*	Corten*	Knotty Pine*	Light Pine*
					
Mesquite*		Burnished Slate TEX	Graphite TEX	Kona Brown TEX	Onyx Black TEX

Colors are shown as accurate as printing methods will permit. Please see actual product samples for true color.  
See cladding product pages for profile color availability and on line Color Catalogue for additional available colors.  
40-year limited warranty on painted products. \*20-year limited warranty for Polyester Printech products.



# CUSTOM | CLADDING





# CUSTOM CLADDING

BOARD & BATTEN







LAP SIDING



VARIABLE PLANK



SQUARE WAVE

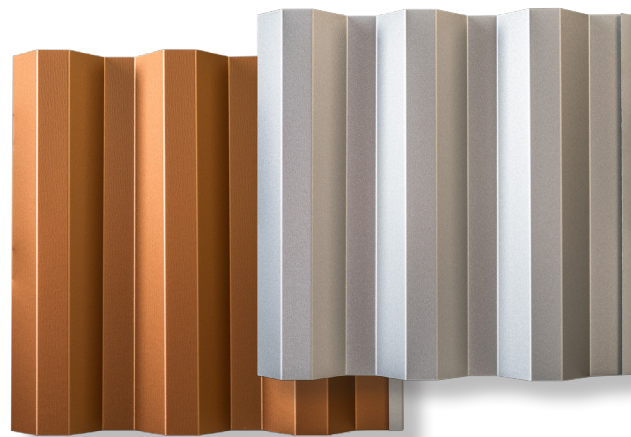

## Installation

**Starting Trims:** Install perimeter base drip flashings and wall penetration trims such as window/door drips and J trims.

**Starter Cleat:** Starter cleat is a piece of trim installed at the bottom or corner of the wall. It provides a secure base for the panel to lock into. Make sure the cleat is level or plumb.

**Panels:** Starting at one end or the bottom of the wall, slide the first row of cladding into the cleat locking the first panel in place. Fasten the panel to the wall with the Bermuda clip at 24" spacing. Repeat the process for each panel making sure the panels are level or plumb.

**Final Trims:** Install any necessary trim pieces or accessories to complete the installation.

## Materials

- 26,24 & 22 Gauge Prepainted Sheet Steel

## Specifications

- Uses: Wall, ceiling and fascia cladding
- Coverage: Standard & custom options available
- Finishes: SMP, PVDF, TEX and Printech
- Fasteners: Concealed/hidden fastener with a Bermuda clip and 2 ACQ panhead screws
- Application: Solid sheathing and rainscreen/girt system
- Orientation: Vertical and horizontal

