



## ABOUT POLYCARBONATE

### INSTALL

**PRE-DRILL ALL HOLES 1/8" TO 3/16" LARGER THAN THE DIAMETER OF THE FASTENER TO BE USED.**

FASTENER PER THOUSAND  
#14 X 1.25" GALV, 1" BONDED  
WASHER (936 PROFILE) \$  
#9 x 1" STAINLESS BRITE WHITE \$

SQUARE WAVE TAB CLOSURE  
36" WHITE \$ EACH

DURACLAD LARGE TAB CLOSURE  
36" \$ EACH

DURACLAD SMALL TAB CLOSURE  
36" \$ EACH

SPAN  
2' O.C.

PANEL THICKNESS  
.8MM

DC-POLY WEIGHT  
.69 LBS/FT.

## BENEFITS

**BRINGS NATURAL LIGHT INTO BUILDINGS**

**100% UV PROTECTION**

**WITHSTANDS EXTREME TEMPERATURES (-40°F TO +270°F)**


**HAIL AND WIND RESISTANT**

**TEN YEAR LIMITED WARRANTY NOTE**

DC-POLY WILL ACCOMMODATE SIDE/END LAPS WITH DURACLAD AND ALLCLAD

# POLYCARBONATE

JULY, 2026

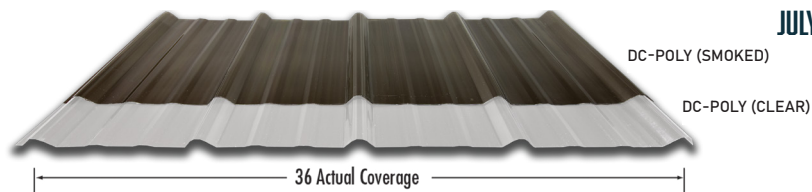


## DURACLAD 36" COVERAGE, 3/4" HIGH RIB, 9" O.C.




|                                    |         |
|------------------------------------|---------|
| DC-POLY 8' CLEAR/SMOKED . . . . .  | \$ EACH |
| DC-POLY 10' CLEAR/SMOKED . . . . . | \$ EACH |
| DC-POLY 12' CLEAR/SMOKED . . . . . | \$ EACH |

## SQUARE WAVE. 24" COVERAGE, 9/16" HIGH RIB, CONTINUOUS

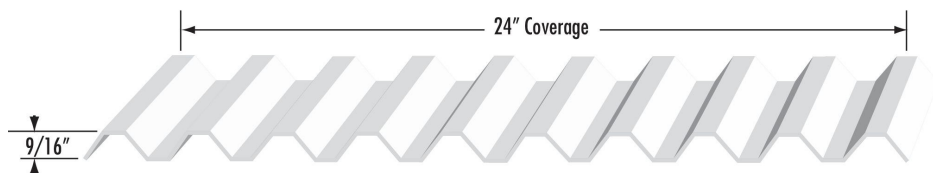

|                                   |         |
|-----------------------------------|---------|
| POLYCARBONATE 8' CLEAR . . . . .  | \$ EACH |
| POLYCARBONATE 10' CLEAR . . . . . | \$ EACH |
| POLYCARBONATE 12' CLEAR . . . . . | \$ EACH |

## RIDGE-LITE. 24" X 10'6"

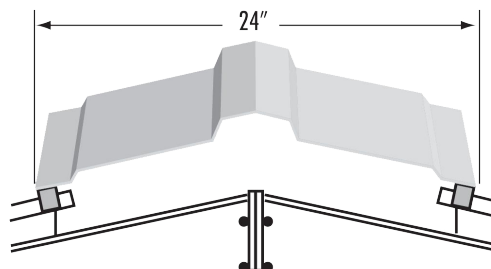

|                                         |         |
|-----------------------------------------|---------|
| POLYCARBONATE RIDGE CAP CLEAR . . . . . | \$ EACH |
|-----------------------------------------|---------|

TERMS NET 30 DAYS. PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

[www.westform.com](http://www.westform.com)